




SNR Bearing Argentina

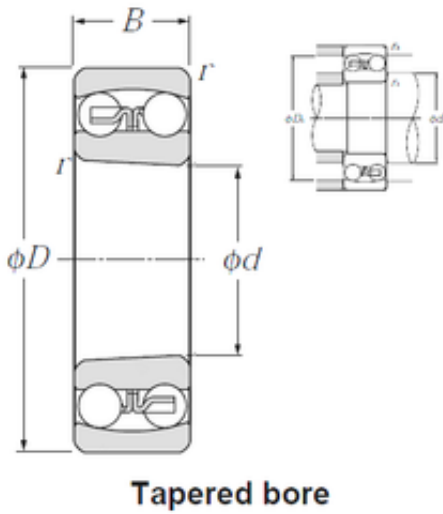

95 mm x 170 mm x 43 mm NTN 2219SK self aligning ball bearings

Bearing No. 2219SK

2219SK Bearing 2D drawings and 3D CAD models

| | |
|-------------------------------|--------------|
| Size | 95x170x43 mm |
| Bore Diameter | 95 mm |
| Outer Diameter | 170 mm |
| Width | 43 mm |
| d | 95 mm |
| D | 170 mm |
| B | 43 mm |
| C | 43 mm |
| r min. | 2,1 mm |
| da min. | 106 mm |
| Da max. | 159 mm |
| ra max. | 2 mm |
| Weight | 3,87 Kg |
| Basic dynamic load rating (C) | 84 kN |
| Basic static load rating (C0) | 34,5 kN |
| (Grease) Lubrication Speed | 3 400 r/min |
| (Oil) Lubrication Speed | 4 000 r/min |
| Calculation factor (e) | 0,27 |
| Calculation factor (Y0) | 2,5 |
| Calculation factor (Y1) | 2,4 |
| rs min | 2.1 mm |
| Associated sleeve reference | H319X |
| e | 0.27 |
| Y1 | 2.4 |
| Y2 | 3.7 |



SNR Bearing Argentina

| | |
|---------------------------------|-----------|
| Y0 | 2.5 |
| Radial clearance class | CN |
| Precision class | P0 |
| Mass | 3.87 kg |
| Dynamic load, C | 84 kN |
| Static load, C0 | 34.5 kN |
| Nlim (oil) | 4,000 rpm |
| Nlim (grease) | 3,400 rpm |
| Min operating temperature, Tmin | -20 ° C |
| Max operating temperature, Tmax | 120 ° C |
| da min | 106 mm |
| da max | 117 mm |
| db min | 102 mm |
| Ce min | 9 mm |
| Da max | 159 mm |
| ra max | 2 mm |