




SNR Bearing Argentina

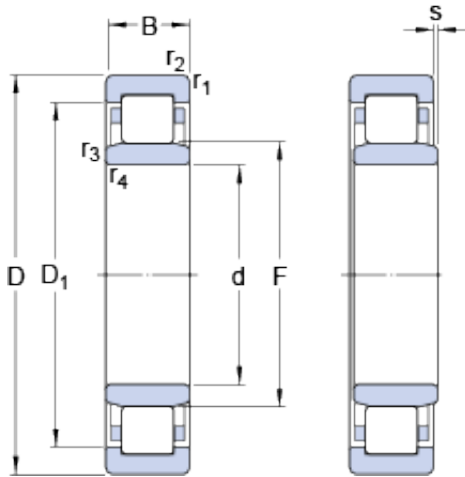

55 mm x 100 mm x 25 mm SKF NU 2211 ECJ
thrust ball bearings

Bearing No. NU 2211 ECJ

NU 2211 ECJ Bearing 2D drawings and 3D CAD models

Size	100x55x25 mm
Bore Diameter	100 mm
Outer Diameter	55 mm
Width	25 mm
d	55 mm
D	100 mm
B	25 mm
D ₁	85.6 mm
F	66 mm
r _{1,2} - min.	1.5 mm
r _{3,4} - min.	1.1 mm
s	1.5 mm
d _a - min.	62 mm
d _a - max.	64 mm
d _b - min.	68 mm
D _a - max.	91.4 mm
r _a - max.	1.5 mm
r _b - max.	1 mm
Basic dynamic load rating - C	114 kN
Basic static load rating - C ₀	118 kN
Fatigue load limit - P _u	15.3 kN
Reference speed	7500 r/min
Limiting speed	8000 r/min
Calculation factor - k _r	0.2



SNR Bearing Argentina

Category	Cylindrical Roller Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.818
EAN	7316577035486
Product Group	B04144
Bore Profile	Straight
Cage Material	Steel
Precision Class	RBEC 1 ISO P0
Number of Rows of Rollers	Single Row
Separable	Inner Ring - Both Sides
Rolling Element	Cylindrical Roller Bearing
Profile	Complete with Outer and Inner Ring
Snap Ring	No
Internal Clearance	C0-Medium
Retainer	Yes
Relubricatable	Yes
Inch - Metric	Metric
Other Features	High Capacity Plain Inner Ring 2 Rib Outer Ring Cage on Outer Ring ID
Long Description	55MM Bore; Straight Bore Profile; 100MM Outside Diameter; 25MM Width; Steel Cage Material; RBEC 1 ISO P0; Single Row; Inner Ring - Both Sides Separable; No Snap Ring; Relubricatable; C0-Medium Inte
Category	Cylindrical Roller Bearing
UNSPSC	31171547
Harmonized Tariff Code	8482.50.00.00
Noun	Bearing



SNR Bearing Argentina

Manufacturer URL	http://www.skf.com
Manufacturer Item Number	NU 2211 ECJ
Weight / LBS	1.801
Width	0.984 Inch 25 Millimeter
Bore	2.165 Inch 55 Millimeter
Outside Diameter	3.937 Inch 100 Millimeter
bore diameter:	55 mm
static load capacity:	118 kN
outside diameter:	100 mm
precision rating:	Not Rated
overall width:	25 mm
maximum rpm:	8000 RPM
flanges:	(2) Outer Ring
bearing material:	Steel
bore type:	Straight
cage material:	Steel
number of rows:	1
finish/coating:	Uncoated
internal clearance:	C0
closure type:	Open
ring separation:	Separable Ring
outer ring width:	25 mm
operating temperature range:	Maximum of +300 ° F
fillet radius:	1.5 mm
dynamic load capacity:	114 kN
series:	NU22
D_1	85.7 mm
$r_{1,2}$ min.	1.5 mm
$r_{3,4}$ min.	1.1 mm
s max.	1.5 mm
d_a min.	62 mm



SNR Bearing Argentina

d_a max.	64 mm
d_b min.	68 mm
D_a max.	91.4 mm
r_a max.	1.5 mm
r_b max.	1 mm
Basic dynamic load rating C	114 kN
Basic static load rating C_0	118 kN
Fatigue load limit P_u	15.3 kN
Calculation factor k_r	0.2
Limiting value e	0.3
Axial load factor Y	0.4
Mass bearing	0.79 kg